



HEAT EXCHANGER CC407FHL WL IP66, XXX HAZARDOUS LOCATION CLASS 1/ZONE 2 (ATEX/IECEX) AIR TO AIR FLUSH MOUNT MODEL

Model	Weight (lbs)	Rating @ 20°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan size	Dimensions-Inches (HxWxD)
CC407FHL	17 lbs	1,400	0.4	2x4"	27.5 x 6.88 x 4.13
Efficiency: 20.4 Watts / °C ΔT based on average internal cabinet temperature					
ATEX/IECEX Certificate Reference: DEMKO 15 ATEX 1403. IECEx UL 15.0081 X					

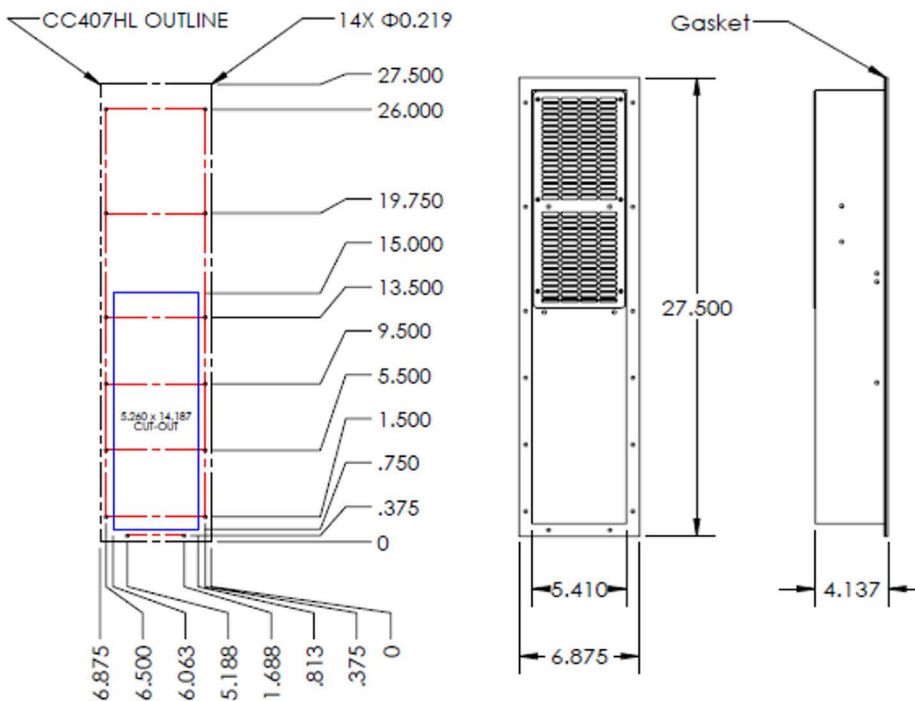

**CABINET HOLE PATTERN
(EXTERNAL VIEW)**

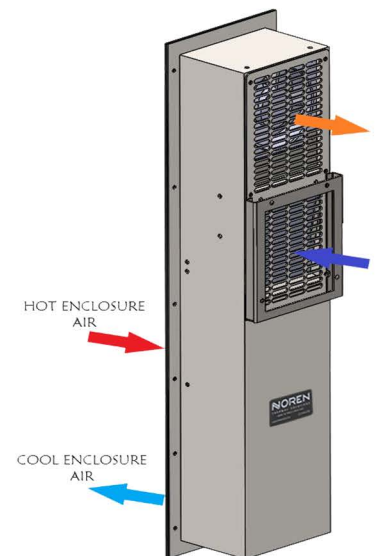

PRODUCT SPECIFICATIONS

1. ATEX/IECEX certified for hazardous locations Class I, Zone 2 environments
2. CC407FHL Rated cooling: 408 Watts at 20°C ΔT (20.4 W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
3. Designed for surface mounting on outside of cabinet
4. Housing is Stainless Steel (TYPE 316 14 GAUGE)
5. Equipped with mounting gasket to maintain air tight seal
6. Available with AC (115 & 230V) and DC (12, 24 & 48V)
7. Unit may be mounted vertically (as shown) or horizontally
8. Optional: inlet air-filter kit available upon request
9. ATEX/IECEX Standards: 60079-0, 6th Ed. + Corr. 1:2012 + Corr. 2:2013, IEC 60079-15, 4th Ed., CENELEC EN 60079-0:2012 + A11:2013 and CENELEC EN 60079-15:2010
10. For design, quote, and sizing assistance: call (512) 595-5700

*Subject to change without notice



Hazardous Location, Class 1, Zone 2
(ATEX/IECEX)
Air to Air Flush Mount Model

NOREN™ 205 s. Edmond Street
THERMAL SOLUTIONS Taylor, TX 76574
(512) 595-5700
www.norenthermal.com

CC407FHL-WL-IP66, xxx

UL-PBD-8.2.1-200001-E