
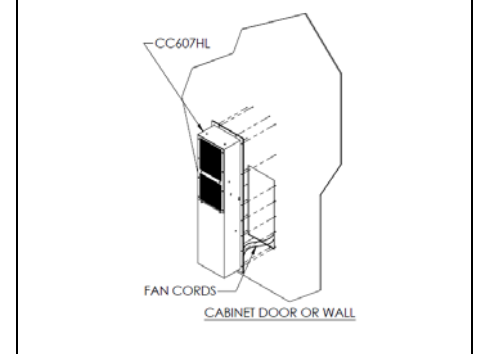


CC607FHL-WL-IP66, xxx COMPACT CABINET COOLER AIR-TO-AIR FLUSH-MOUNT MODEL HAZARDOUS LOCATION CLASS I, ZONE 2 (ATEX/IECEx)

Model	Weight	Rating @ 20°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC607FHL	30 lbs	3,300	0.6	2 x 6"	35 x 9-3/8 x 5

Efficiency: 49.4 Watts / °C ΔT based on average internal cabinet temperature.

ATEX/IECEx Certificate Reference: **DEMKO 15 ATEX 1403. IECEx UL 15.0081 X**

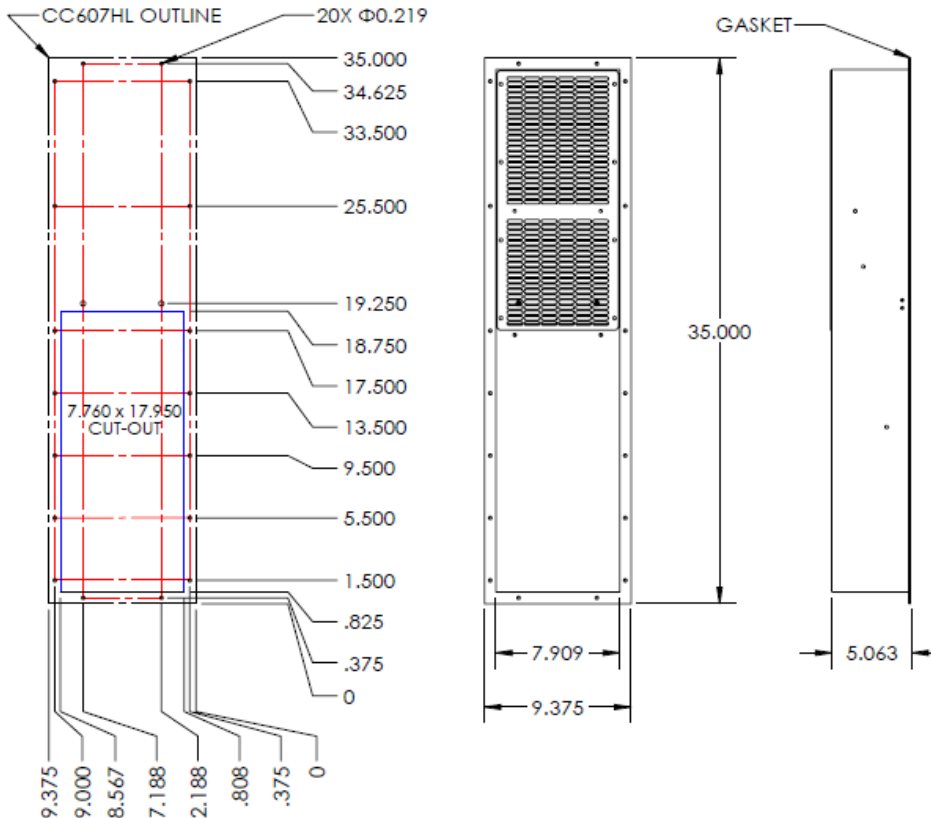

SPECIFICATIONS

1. ATEX/IECEx certified for hazardous locations Class I, Zone 2 environments.
2. CC607FHL Rated cooling: 988 Watts at 20°C ΔT (49.4W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
3. Designed for surface mounting on outside of cabinet.
4. Housing is Stainless Steel (TYPE 316 14 GAUGE).
5. Equipped with mounting gasket to maintain air tight seal.
6. Available with AC (115 & 230V) and DC (12, 24 & 48V).
7. Unit may be mounted vertically (as shown) or horizontally.
8. Optional: inlet air-filter kit available upon request.
9. ATEX/IECEx Standards: 60079-0, 6th Ed. + Corr. 1:2012 + Corr. 2:2013, IEC 60079-15, 4th Ed., CENELEC EN 60079-0:2012 + A11:2013 and CENELEC EN 60079-15:2010
10. For design, quote, and sizing assistance: call (866) 936-6736.

Subject to change without notice.



1010 O'Brien Drive
Menlo Park, CA 94025
650.322.9500
norenproducts.com

CC607FHL-WL-IP66, xxx

UL-PBD-7.2.2-200002-D