


CC6361P & CC6362P* TYPE 4 or 4X Compact Cabinet Cooler Air-To-Water Flush-Mount Model

Model	Weight	Rating @ 40°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC6361 / 6362*	32 lbs	21,800*	0.9	3 x 6"	29 x 13-7/8 x 7-7/8

Efficiency: 159.7 Watts / °C ΔT based on average internal cabinet temperature.

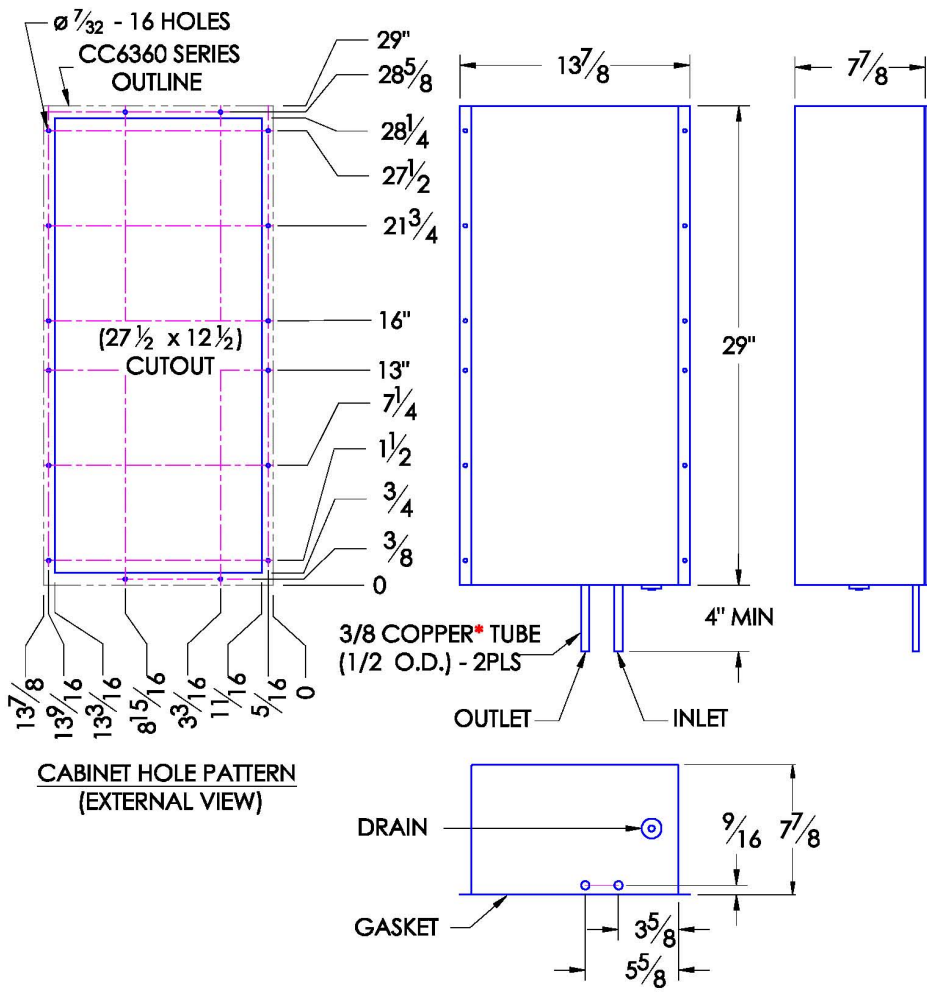

Outside View



Inside View

SPECIFICATIONS

- UL Listed for TYPE 4 or 4X environments.
- CC6361P Rated cooling: 6,389 Watts mounted to an uninsulated 72" x 36" x 24" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature.
- CC6362P HAS ALL TYPE 304 OR IF SPECIFIED 316 STAINLESS STEEL WATER LINES THROUGHOUT UNIT (WITH ALUMINUM FINS). Unit gives approx. 2% less thermal performance. (approx. 6,260 Watts or 21,400 BTU/hr.)**
- Designed for surface mounting on the outside of cabinet.
- TYPE 4 housing is aluminum housing (color is black).
- TYPE 4X housing is type 304 or 316 stainless steel.
- External water inlet and outlet connections.
- Equipped with mounting gasket to maintain air tight seal.
- Pressure tested to assure water tight seal.
- Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website.
- Vertical mounting only.
- Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi.
- Recommended coolant flow rate (gallons per minute): 1 GPM
- SF/ANSI/CAN 61&372 certified unit available
- For design, quote, and sizing assistance: call (512) 595-5700.**

Subject to change without notice.



NOREN THERMAL SOLUTIONS
205 S. Edmond Street
Taylor, TX 76574
(512) 595-5700
www.norenthermal.com

CC6361P & CC6362P* TYPE 4 or 4X

CCS-PBD-8.2.1-883338-H