
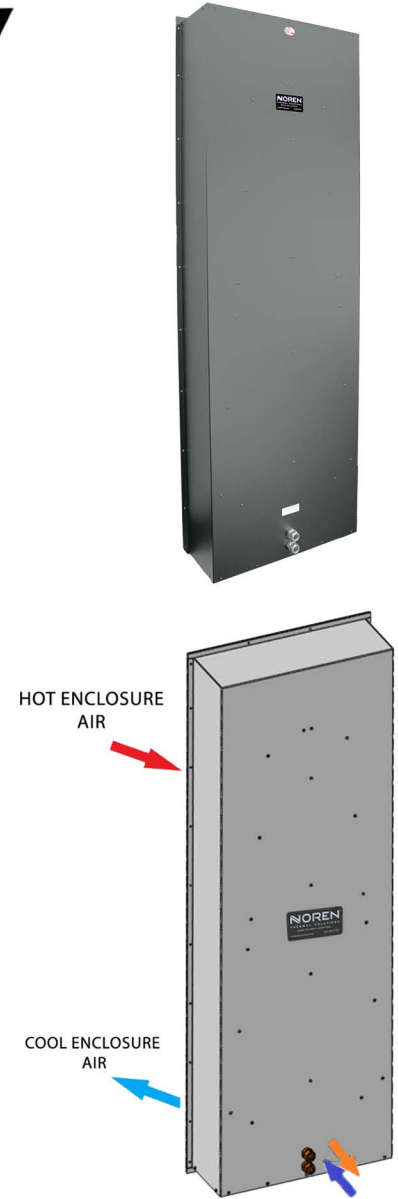


HEAT EXCHANGER CC9000 TYPE 12 AIR TO WATER FLUSH MOUNT MODEL

| Model | Weight (lbs) | Rating @ 40°C ΔT (BTU/hr) | Amps Current Draw at 115 volts AC | Fan size | Dimensions-Inches (HxWxD) |
|--------|--------------|---------------------------|-----------------------------------|----------|---------------------------|
| CC9000 | 79 lbs | 57,000 | 2.4 | 8x6" | 70.5 x 23.75 x 8 |

Efficiency: 417.0 Watts / °C ΔT based on average internal cabinet temperature

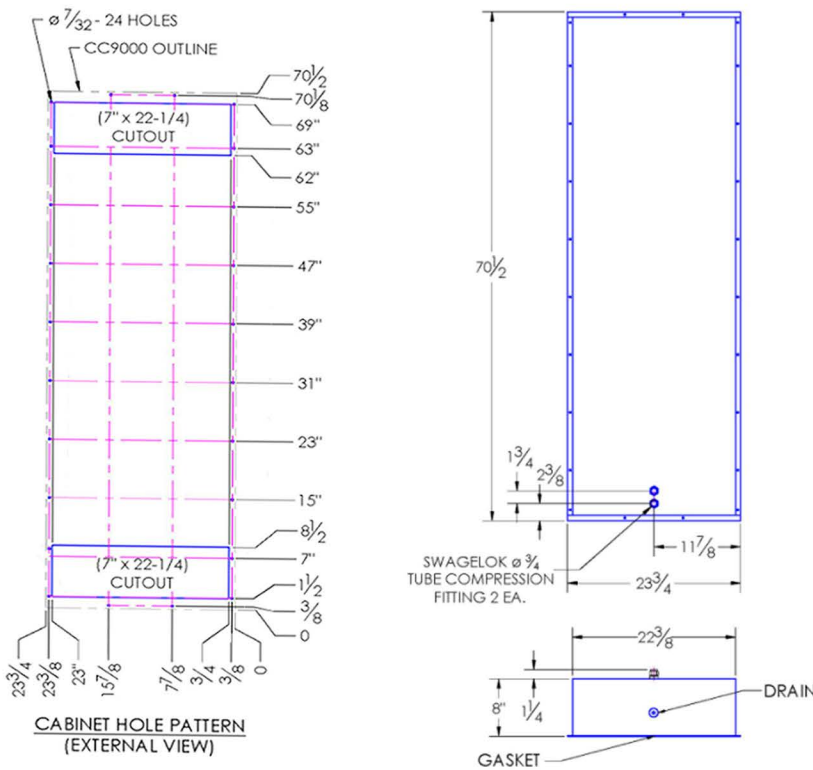

PRODUCT SPECIFICATIONS

1. UL listed for TYPE 12 environments
2. CC9000 Rated cooling: 16,680 Watts mounted on an uninsulated 72" x 36" x 24". Cabinet with 2 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature
3. Designed for surface mounting on the outside of cabinet
4. Housing is aluminum (Standard color) or stainless steel
5. External water inlet and outlet connections
6. Equipped with mounting gasket to maintain airtight seal
7. Available with AC (115 & 230V) and DC (12, 24, & 48V) fans
8. Vertical mounting only (as shown)
9. Coolant water pressure: Pressure tested to 100 psi. Safe Working pressure is 60 psi
10. Recommended coolant flow rate (gallons per minute): 2 GPM
11. For design, quote, and sizing assistance: Call (512)595-5700

*Subject to change without notice



Meets the Requirements of NSF/ANSI/CAN 61 & 62
UL File #SA9567

CC9000 TYPE 12
Air to Water Flush Mount Model

NOREN™ 205 s. Edmond Street
Taylor, TX 76574
(512) 595-5700
THERMAL SOLUTIONS www.norenthermal.com

**CC9000 FLUSH MOUNT
TYPE 12**

CCS-PBD-7.2.2-883322-D