



## HEAT EXCHANGER ECX-600F ECO COOL FLUSH MOUNT MODEL

MODEL	Weight (lbs.)	Rating @ 20°C ΔT (BTU/hr)	Efficiency (Watts/°C)	Rating AT 20 °C ΔT <u>WATTS COOLING</u>	Amps CURRENT DRAW AT 115 VOLTS AC	Fan Size	DIMENSIONS (INCHES) (HxWxD)
ECX-600F	51 lbs	5,100	80	1700	2.94	6 - 6"	35.99"H X 14.73"W X 9.18"D

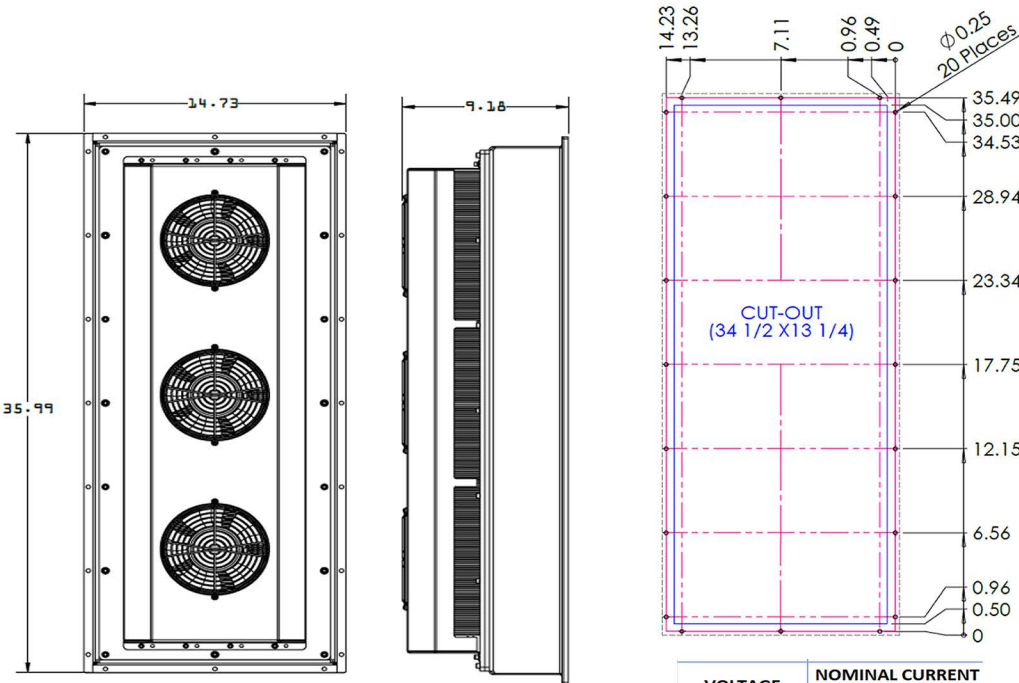

VOLTAGE	NOMINAL CURRENT (Amps)
115 VAC	2.94
230 VAC	1.56
24 VDC	12.12
48 VDC	6.06

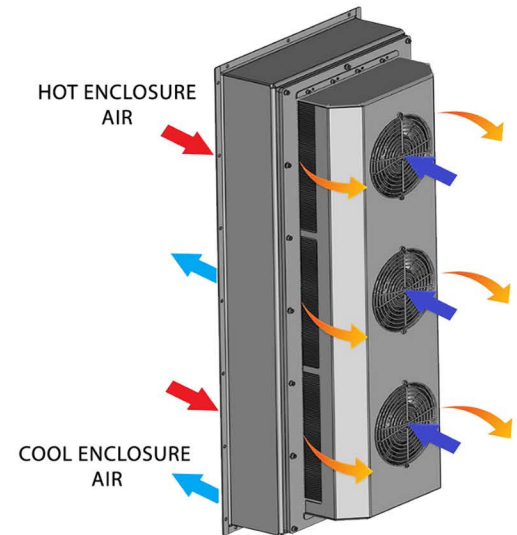

## PRODUCT SPECIFICATIONS

1. UL Listed for Type 12 and 4 environments
2. ECX600F Rated cooling: 1700 Watts at 20°C ΔT. (80 W/°C, mounted to an uninsulated 72" X 36" X 24" cabinet)
3. Housing is aluminum (Standard color)
4. Equipped with mounting gasket to maintain airtight seal
5. Internal 6-ft power cord with 3-prong plug is standard for AC powered units
6. Available with VAC (115 & 230) (Frequency 50/60 Hz). VDC (24 & 48) fans. DC powered units include junction box, consult website
7. Unit may be mounted vertically (as shown) or horizontally
8. Drop-In and Flush mount versions available
9. For design, quote, and sizing assistance: call (512) 595-5700

Subject to change without notice



UL File #SA9567

**ECX-600F**  
Eco-Cool Heat Exchanger  
Air-to-Air Flush Mount

**NOREN**  
THERMAL SOLUTIONS

205 s. Edmond Street  
Taylor, TX 76574  
(512) 595-5700.  
[www.norenthermal.com](http://www.norenthermal.com)

**ECX-600 FLUSH MOUNT**

ECX-PBD-8.2.1-883652-B