

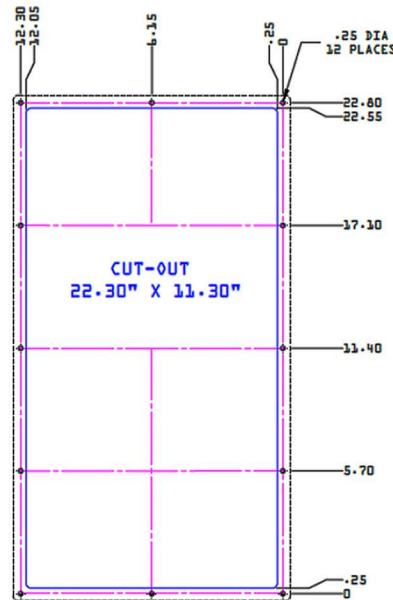
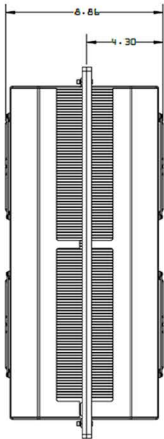


## HEAT EXCHANGER ECX-400 ECO COOL DROP IN MODEL

MODEL	Weight (lb)	Rating @ 20°C ΔT (BTU/hr)	Efficiency (Watts/°C)	Rating AT 20 °C ΔT WATTS COOLING	Amps CURRENT DRAW AT 115 VOLTS AC	FAN SIZE	DIMENSIONS  (INCHES) (HxWxD)
ECX-400	34 lb	3,960	66	1320	1.96	4 - 6"	23.5"H X 13"W X 8.3"D

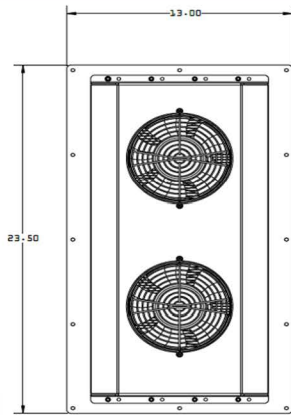

VOLTAGE	NOMINAL CURRENT (AMPS)
115 VAC	1.96
230 VAC	1.04
24 VDC	8.08
48 VDC	4.04

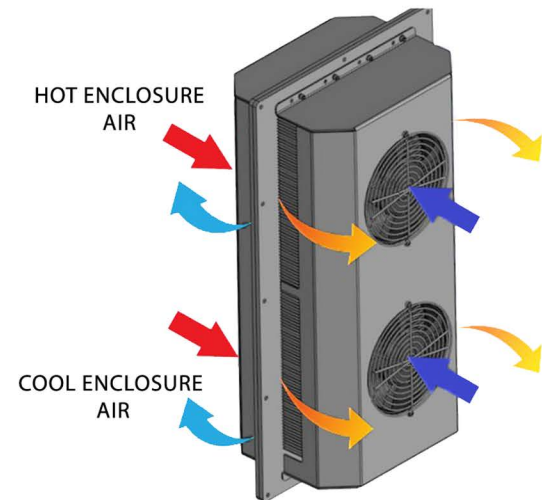


## PRODUCT SPECIFICATIONS

1. UL Listed for Type 12 and 4 environments
2. ECX-400 Rated cooling: 1320 Watts at 20°C ΔT. (66 W/°C), mounted to an uninsulated (72" X 36" X 24" cabinet)
3. Extend 4.3" into cabinet
4. Housing is aluminum (Standard color)
5. Equipped with mounting gasket to maintain airtight seal
6. Internal 6-ft power cord with 3-prong plug is standard for AC powered units. Available with VAC (115 and 230) (Frequency 50/60 Hz).
7. VDC (24 and 48) fans. DC powered units include junction box, consult website
8. Unit may be mounted vertically (as shown) or horizontally
9. Flush mount version available
10. For design, quote, and sizing assistance: call (512) 595-5700

\*Subject to change without notice



**ECX-400**  
Eco-Cool Heat Exchanger  
Air-to-Air Drop-In Model



205 s. Edmond Street  
Taylor, TX 76574  
(512) 595-5700.  
[www.norenthermal.com](http://www.norenthermal.com)

**ECX-400 DROP-IN MODEL**

ECX-PBD-8.2.1-883659-B