
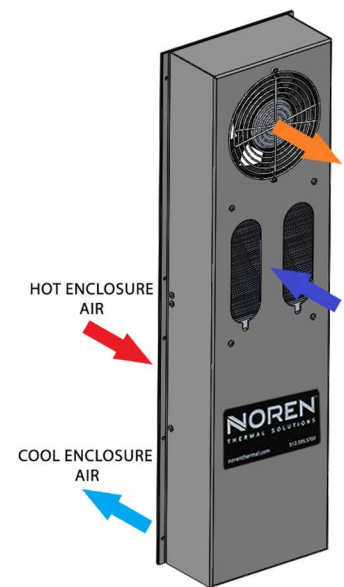


## HEAT EXCHANGER CC601F WL TYPE 4 AIR TO AIR FLUSH MOUNT MODEL

Model	Weight (lbs)	Rating @ 20°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan size	Dimensions-Inches (HxWxD)
CC601F-WL-TYPE 4	14 lbs	3,300	0.6	2x6"	30 x 8.75 x 4

Efficiency: 49.4 Watts / °C ΔT based on average internal cabinet temperature

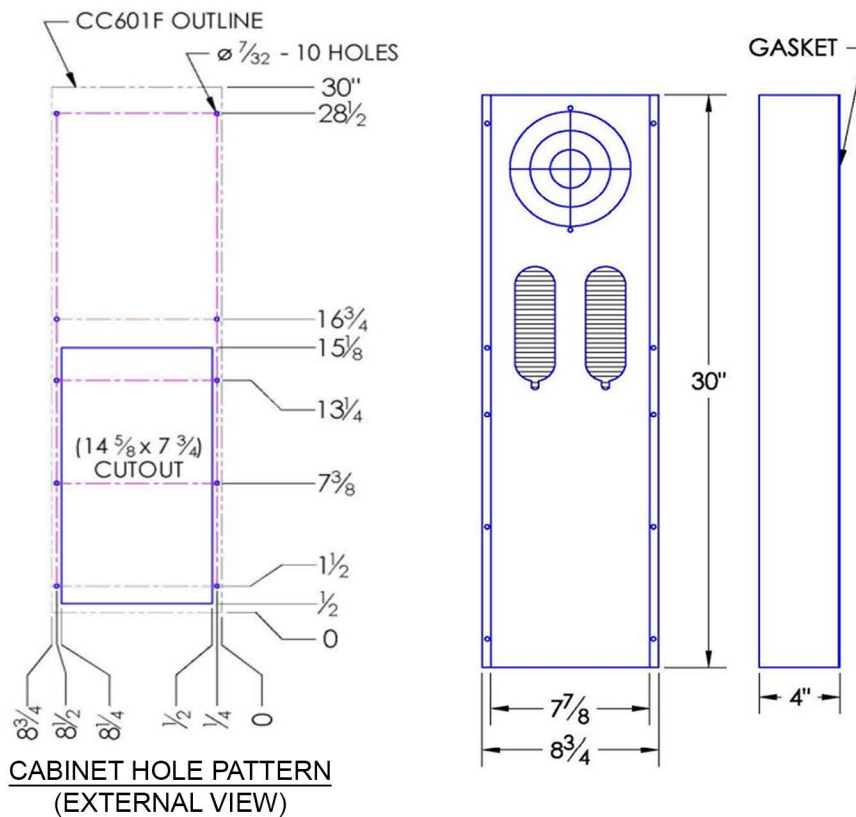

### PRODUCT SPECIFICATIONS

1. UL Listed for TYPE 4 environments
2. CC601F Rated cooling: 988 Watts at 20°C ΔT (49.4 W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
3. Designed for surface mounting on outside of cabinet
4. Housing is aluminum (Standard color). Stainless Steel is available (TYPE 4X)
5. Equipped with mounting gasket to maintain the TYPE 4 integrity of your cabinet
6. Pressure tested to insure liquid tight seal
7. External fan is UL rated for Wet Locations / Outdoor use (WL). This new fan is the Noren Universal Fan (UF)
8. Internal 6-ft. Power cord with 3-prong plug is standard for AC powered Units
9. Available with VAC (115 & 230) and VDC (12, 24, & 48) fans. DC powered units includes junction box, consult website
10. Vertical mounting (as shown) is standard. Call for horizontal applications
11. Optional: Inlet air-filter kit available upon request
12. For design, quote, and sizing assistance: call (512) 595-5700

\*Subject to change without notice



**CC601F WL Type 4**  
**Air to Air Flush Mount Model**



**CC601F-WL-TYPE 4**

CCS-PBD-7.2.2-883399-C