
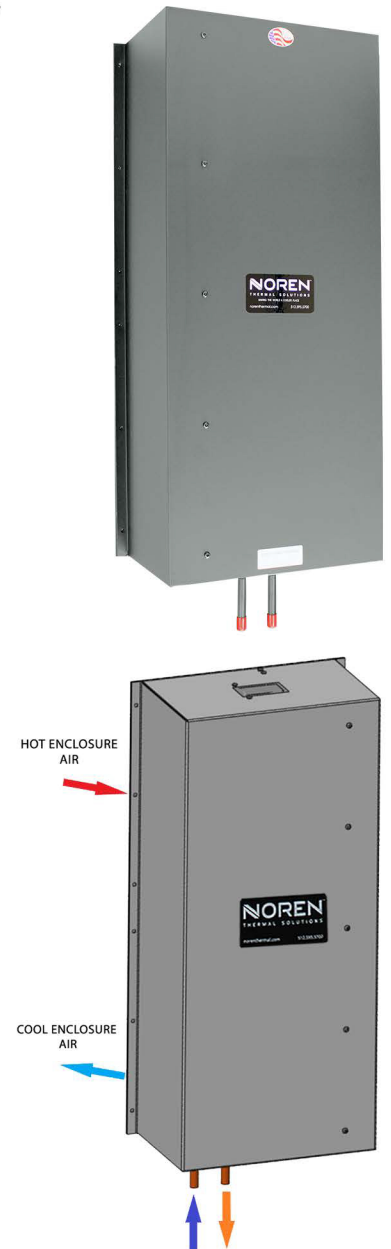


HEAT EXCHANGER CC6360 TYPE 12 AIR TO WATER FLUSH MOUNT MODEL

Model	Weight (lbs)	Rating @ 40°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan size	Dimensions-Inches (HxWxD)
CC6360	32 lbs	21,800	0.9	3x6"	29 x 13.8 x 7.8

Efficiency: 159.7 Watts / °C ΔT based on average internal cabinet temperature

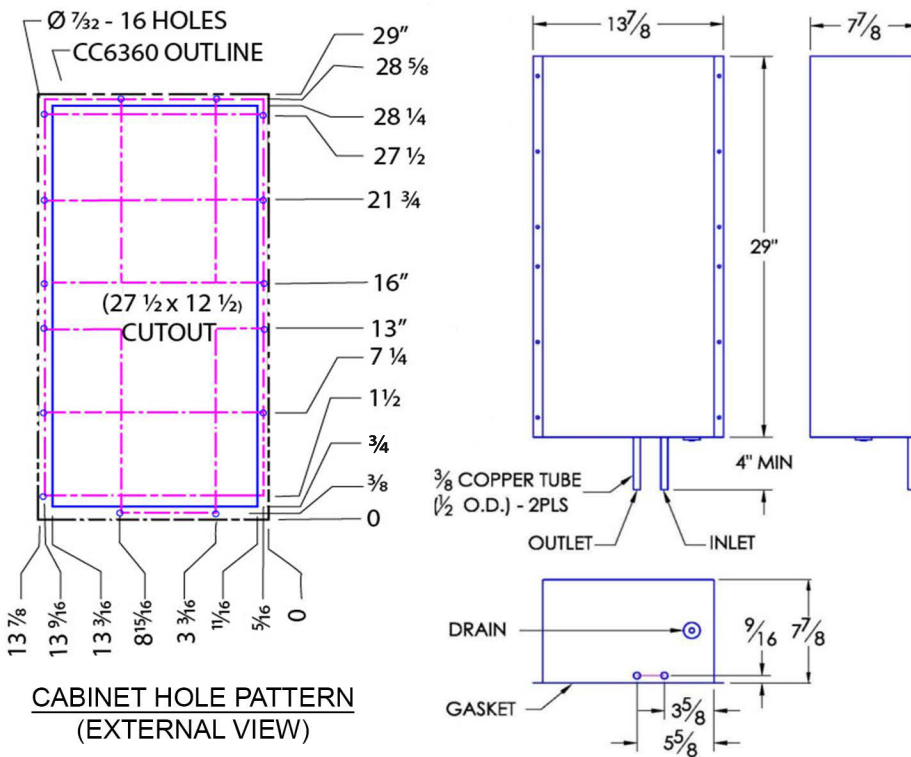

PRODUCT SPECIFICATIONS

1. UL Listed for TYPE 12 environments
2. CC6360 Rated cooling: 6,388 Watts mounted to an uninsulated 72" x 36" x 24" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature
3. Designed for surface mounting on the outside of cabinet
4. Housing is aluminum (Standard color)
5. External water inlet and outlet connections
6. Equipped with mounting gasket to maintain airtight seal
7. Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website
8. Vertical mounting only
9. Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi
10. Recommended coolant flow rate (gallons per minute): 1 GPM
11. For design, quote, and sizing assistance: call (512) 595-5700

*Subject to change without notice



UL File #SA9567

CC6360 TYPE 12 Air to Water Flush Mount Model

NOREN™ 205 s. Edmond Street
Taylor, TX 76574
THERMAL SOLUTIONS (512) 595-5700
www.norenthermal.com

CC6360 FLUSH MOUNT TYPE 12

CCS-PBD-7.2.2-883345-C