
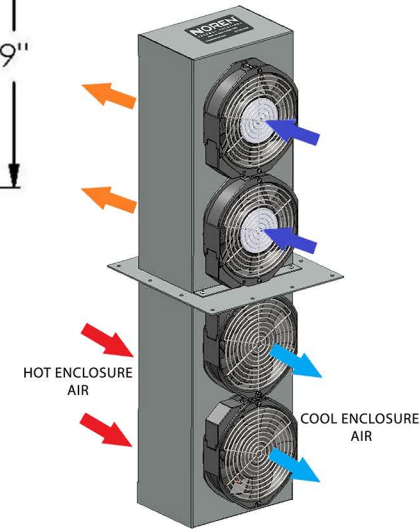


## HEAT EXCHANGER CC2000 TYPE 12 AIR TO AIR DROP IN MODEL

Model	Weight (lbs)	Rating @ 20°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan size	Dimensions-Inches (HxWxD)
CC2000	28 lbs	7,500	1.2	4 x6"	30 x 7.75 x 7
Efficiency: 110.4 Watts / °C ΔT based on average internal cabinet temperature					

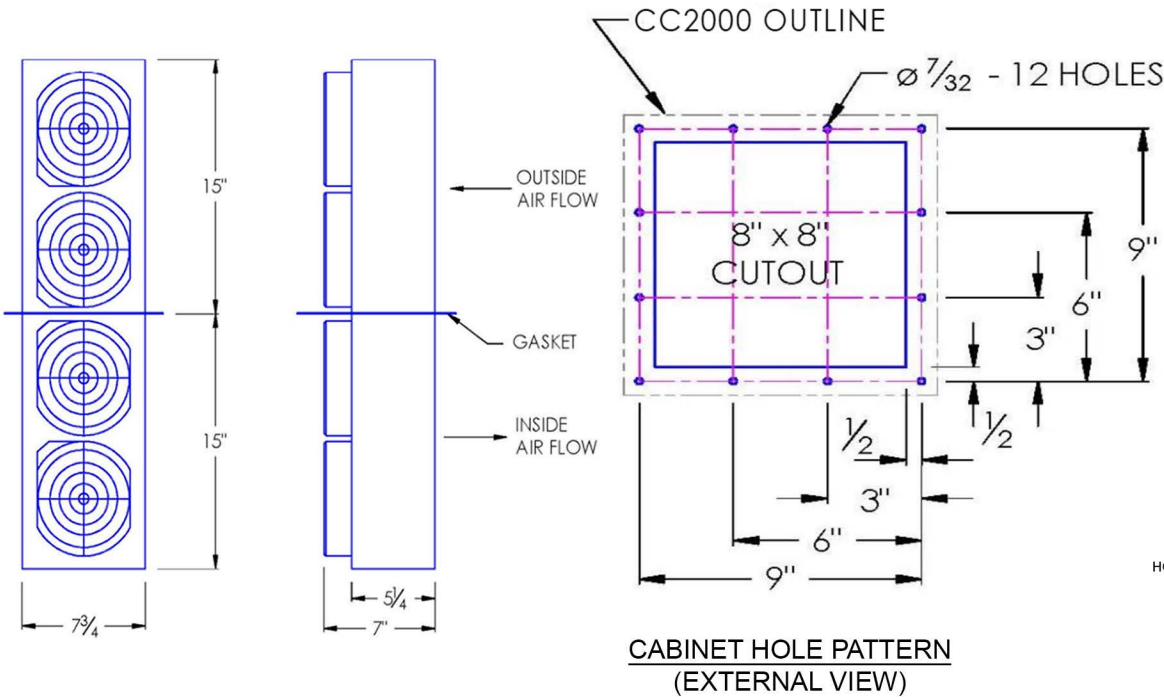

### PRODUCT SPECIFICATIONS

1. UL Listed for TYPE 12 environments
2. CC2000 Rated cooling: 2,208 Watts at 20°C ΔT (110.4 W/°C mounted to an uninsulated 72" X 36" X 24" Cabinet)
3. Extends 15" into cabinet
4. Housing is aluminum (Standard color). Stainless steel is available
5. Equipped with mounting gasket to maintain air tightseal
6. Internal 6-ft. power cord with 3-prong plug is standard for AC powered units
7. Available with VAC (115 & 230) and VDC (12, 24, & 48) fans. DC powered units include junction box, consult website
8. Unit may be mounted vertically (as shown) or horizontally
9. Optional: inlet air-filter kit available upon request
10. For design, quote, and sizing assistance: call (512) 595-5700

\*Subject to change without notice



UL File #SA9567

CC2000 Type 12  
Air to Air Drop In Model

**NOREN™** 205 s. Edmond Street  
Taylor, TX 76574  
THERMAL SOLUTIONS (512) 595-5700.  
[www.norenthermal.com](http://www.norenthermal.com)

**CC2000 DROP-IN TYPE 12**

CCS-PBD-7.2.2-883359-C