
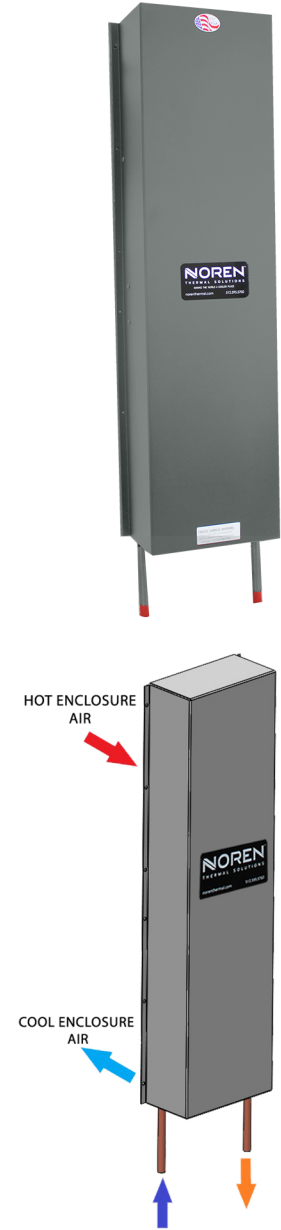
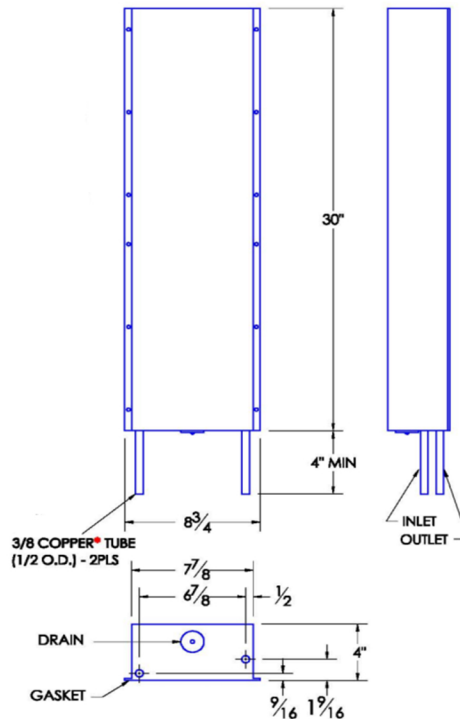


## HEAT EXCHANGER CC3061 TYPE 4 AIR TO WATER FLUSH MOUNT MODEL

Model	Weight (Lbs)	Rating @ 40°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan Size	Dimensions- Inches (HxWxD)
CC3061	13 Lbs	9,300	0.3	1x6"	30 x 8.75 x 4

Efficiency: 68.8 Watts / °C ΔT based on average internal cabinet temperature

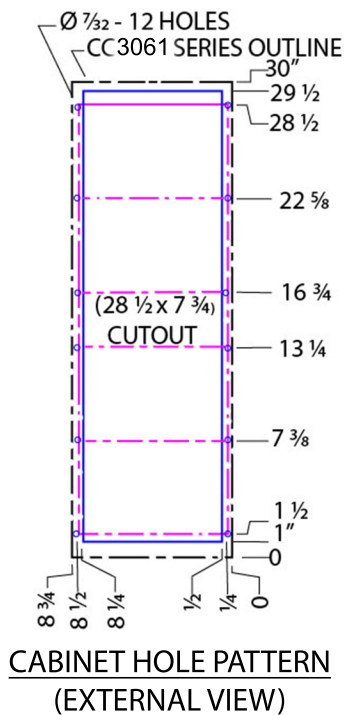

### PRODUCT SPECIFICATIONS

1. UL Listed for TYPE 4 and 4X environments
2. CC3061 Rated cooling: 2,725 Watts mounted to an uninsulated 72" x 36" x 24" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature
3. Designed for surface mounting on the outside of cabinet
4. Housing is Type 304 Stainless Steel (316 SS or powder coated Aluminum optional)
5. External water inlet and outlet connections
6. Equipped with mounting gasket to maintain the TYPE 4 integrity of your cabinet
7. Available with AC (115 & 230V) and DC (12, 24, & 48V) fans  
DC version includes junction box, consult website
8. Vertical mounting only
9. Coolant water pressure: Pressure tested to 100 psi  
Safe working pressure is 60 psi
10. Recommended coolant flow rate (gallons per minute): 1 GPM
11. For design, quote, and sizing assistance: call (512) 595-5700

\*Subject to change without notice



### CC3061 TYPE 4 Air to Water Flush Mount Model

**NOREN™** 205 s. Edmond Street  
Taylor, TX 76574  
(512) 595-5700  
THERMAL SOLUTIONS [www.norenthermal.com](http://www.norenthermal.com)

### CC3061 FLUSH MOUNT TIPO 4

CCS-PBD-7.2.2-883343-C