



HEAT EXCHANGER CC3260 TYPE 12 AIR TO WATER FLUSH MOUNT MODEL

Model:	Weight:	Rating @ 40 °CΔT BTU/hr:	Amps Current Draw a 115 VAC:	Fan Size:	Dimensions-Inches: (H" x W" x D"):
CC3260	13 [lbs]	8,600	0.3	1 x 6"	13-7/8 x 12 x 7-7/8
Efficiency: 62.7 Watts/ °CΔT based on average internal cabinet temperature.					

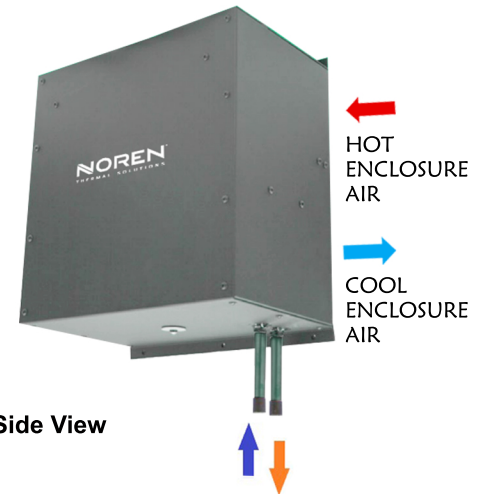

Outside View

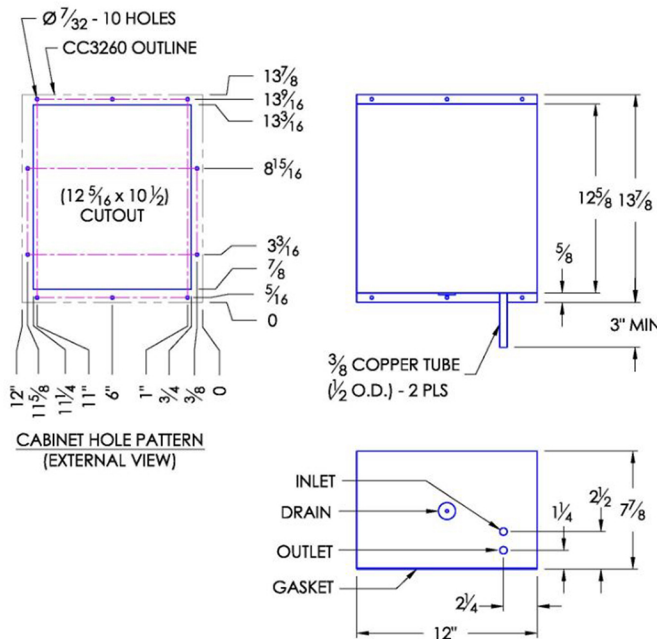

Side View

PRODUCT SPECIFICATIONS

1. UL Listed for TYPE 12 environments.
2. CC3260 Rated cooling: 2,508 Watts mounted to an uninsulated 24" x 24" x 16" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature.
3. Designed for surface mounting on the outside of cabinet.
4. Housing is aluminum (Standard color)
5. External water inlet and outlet connections.
6. Equipped with mounting gasket to maintain air tight seal.
7. Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website.
8. Vertical mounting only.
9. Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi.
10. Recommended coolant flow rate (gallons per minute): 1 GPM
11. NSF/ANSI/CAN 61&372 certified unit available
12. For design, quote, and sizing assistance: call (512) 595-5700.

*Subject to change without notice



UL File #SA9567

CC3260 TYPE 12 Air-to-Water Flush Mount Model

NOREN™ THERMAL SOLUTIONS
205 s. Edmond Street
Taylor, TX 76574
(512) 595-5700
www.norenthermal.com

CC3260 TYPE 12

CCS-PBD-8.2.1-883344-G