



## **HEAT EXCHANGER CC500 TYPE 12 AIR TO AIR DROP IN MODEL**


Mod	el Weight (lbs)	Rating @ 20°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan size	Dimensions-Inches (HxWxD)
CC50	00 11 lbs	2,400	0.6	2x6"	15 x 7.75 x 7


Efficiency: 35.2 Watts / °C ΔT based on average internal cabinet temperature

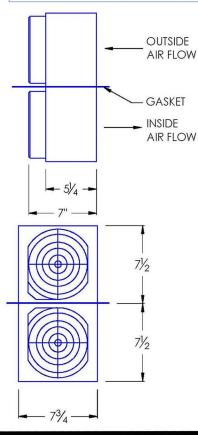

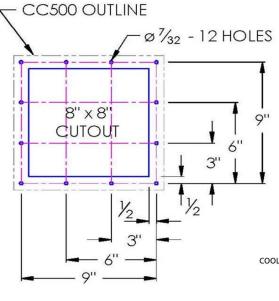

CABINET HOLE PATTERN (EXTERNAL VIEW)






## PRODUCT SPECIFICATIONS

- 1. UL Listed for TYPE 12 environments
- 2. CC500 Rated cooling: 704 Watts at 20°C ΔT (35.2 W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
- 3. Extends 7-1/2" into cabinet
- 4. Housing is aluminum (Standard color) Stainless steel is available
- 5. Equipped with mounting gasket to maintain airtight seal
- 6. Internal 6-ft. Power cord with 3-prong plug is standard for AC powered units
- 7. Available with VAC (115 & 230) and VDC (12, 24, & 48) fans. DC powered units include junction box, consult website
- 8. Unit may be mounted vertically (as shown) or horizontally
- 9. Optional: Inlet air-filter kit available upon request
- 10. For design, quote, and sizing assistance: call (512) 595-5700



CC500 Type 12 Air to Air Drop In Model



<sup>\*</sup>Subject to change without notice