
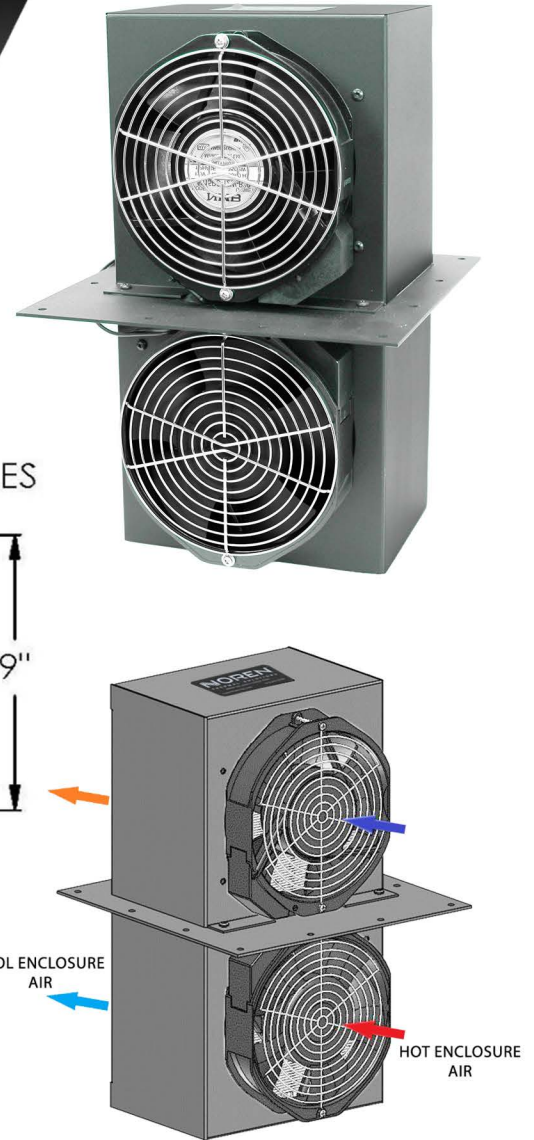


HEAT EXCHANGER CC800 TYPE 12 AIR TO AIR DROP IN MODEL

Model	Weight (lbs)	Rating @ 20°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan size	Dimensions-Inches (HxWxD)
CC800	16 lbs	3,800	0.6	2x6"	15 x 7.75 x 7

Efficiency: 55.2 Watts / °C ΔT based on average internal cabinet temperature

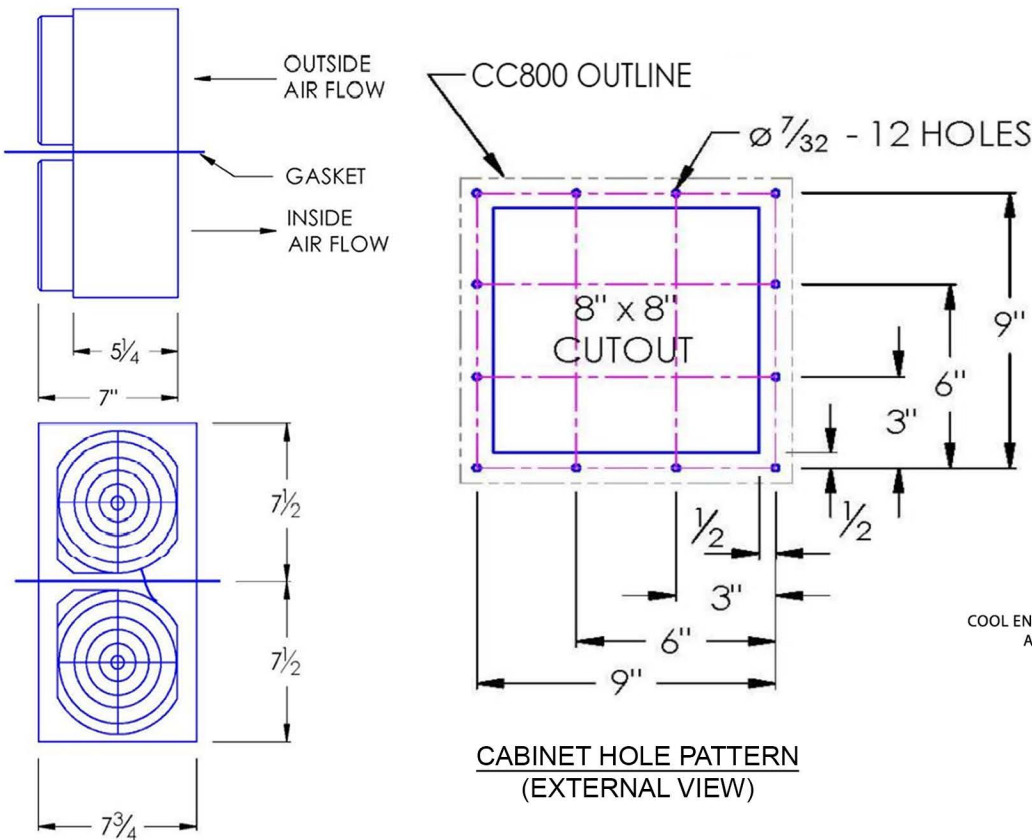

PRODUCT SPECIFICATIONS

1. UL Listed for TYPE 12 environments
2. CC800 Rated cooling: 1,100 Watts at 20°C ΔT (55.2 W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
3. Extends 7-1/2" into cabinet
4. Housing is aluminum (Standard color). Stainless steel is available
5. Equipped with mounting gasket to maintain airtight seal
6. Internal 6-ft. Power cord with 3-prong plug is standard for AC powered units
7. Available with VAC (115 & 230) and VDC (12, 24, & 48) fans
DC powered units include junction box, consult website
8. Unit may be mounted vertically (as shown) or horizontally
9. Optional: Inlet air-filter kit available upon request
10. For design, quote, and sizing assistance: call (512) 595-5700

*Subject to change without notice



UL File #SA9567

CC800 Type 12 Air to Air Drop In Model

NOREN™ THERMAL SOLUTIONS
205 s. Edmond Street
Taylor, TX 76574
(512) 595-5700.
www.norenthermal.com

CC800 DROP-IN TYPE 12

CCS-PBD-7.2.2-883353-C