
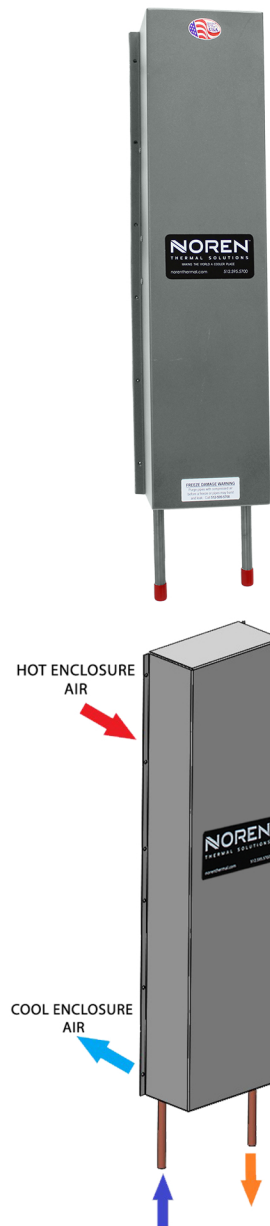
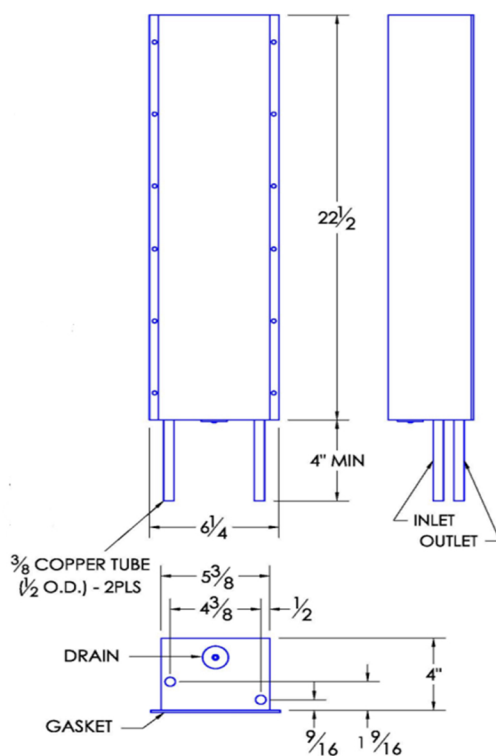


HEAT EXCHANGER CC2060 TYPE 12 FLUSH MOUNT MODEL AIR TO WATER

Model	Weight (lbs)	Rating @ 40°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan size	Dimensions-Inches (HxWxD)
CC2060	9	3,350	0.2	1x4"	22.5 x 6.25 x 4

Efficiency: 24.5 Watts / °C ΔT based on average internal cabinet temperature

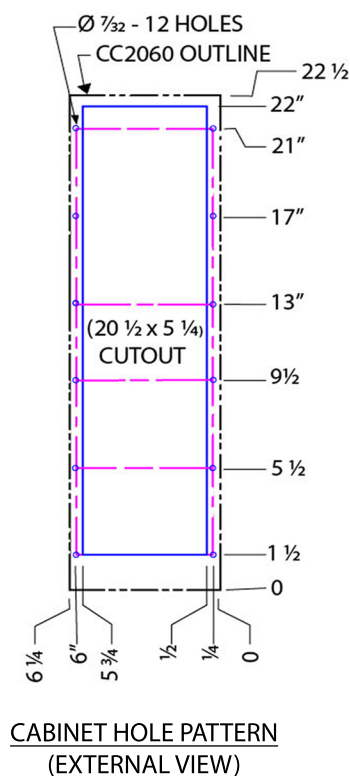

PRODUCT SPECIFICATIONS

1. UL Listed for TYPE 12 environments
2. CC2060 Rated cooling: 980 Watts mounted to an uninsulated 24" x 24" x 16" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature
3. Designed for surface mounting on the outside of cabinet
4. Housing is aluminum (Standard color)
5. External water inlet and outlet connections
6. Equipped with mounting gasket to maintain airtight seal.
7. Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website
8. Vertical mounting only
9. Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi
10. Recommended coolant flow rate (gallons per minute): 1 GPM
11. For design, quote, and sizing assistance: call (512) 595-5700

*Subject to change without notice



UL File #SA9567

CC2060 TYPE 12 Air to Water Flush Mount Model

NOREN
THERMAL SOLUTIONS

205 s. Edmond Street
Taylor, TX 76574
(512) 595-5700
www.norenthermal.com

CC2060 FLUSH MOUNT TYPE 12

CCS-PBD-7.2.2-883342-C