




HEAT EXCHANGER CC2501F WL TYPE 4X AIR TO AIR FLUSH MOUNT MODEL

Model	Weight (lbs)	Rating @ 20°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan size	Dimensions-Inches (HxWxD)
CC2501F-WL-TYPE 4X	48 lbs	7,100	1.2	4x6"	29 x 13.8 x 7.8

Efficiency: 104.0 Watts / °C ΔT based on average internal cabinet temperature

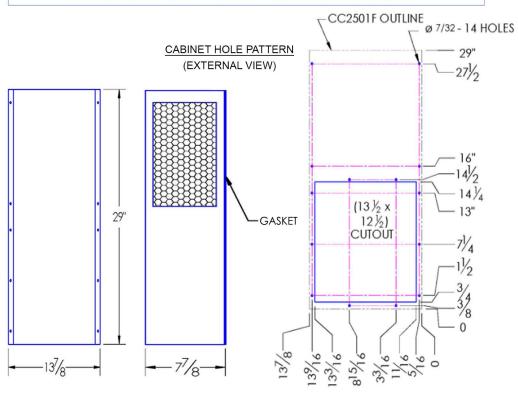

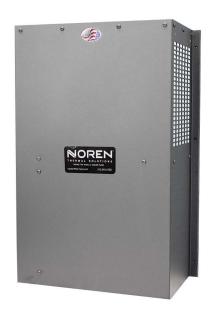

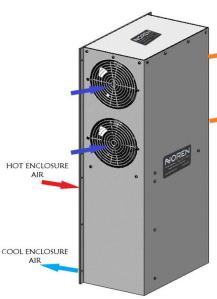

PRODUCT SPECIFICATIONS

- 1. UL Listed for TYPE 4 or 4X environments
- **2.** CC2501F Rated cooling: 2,080 Watts at 20°CΔT (104.0 W/°C, mounted to an uninsulated 72" x 36" x 24" cabinet)
- 3. Designed for surface mounting on outside of cabinet
- 4. Housing is Type 304 Stainless Steel. (316 SS or powder coated Aluminum optional)
- **5.** Equipped with mounting gasket to maintain the TYPE 4X integrity of your cabinet
- 6. Pressure tested to insure liquid tight seal
- 7. External fan is UL rated for Wet Locations / Outdoor use (WL)
- 8. Internal 6-ft. power cord with 3-prong plug is standard for AC powered units
- 9. Available with VAC (115 & 230) and VDC (12, 24, & 48) fans. DC powered units include junction box, consult website
- 10. Vertical mounting (as shown) is standard. Call for horizontal applications
- 11. Optional: inlet air-filter kit available upon request
- 12. For design, quote, and sizing assistance: call (512) 595-5700



CC2501F WL Type 4X Air to Air Flush Mount Model



^{*}Subject to change without notice