
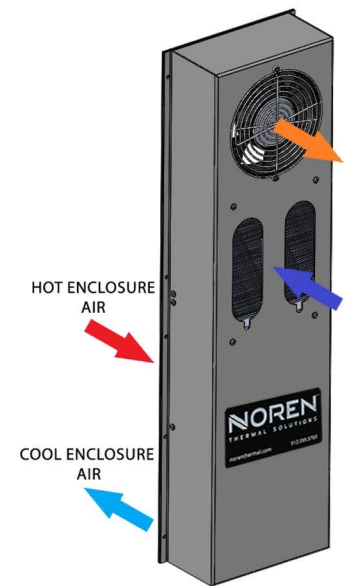


HEAT EXCHANGER CC600F TYPE 12 AIR TO AIR FLUSH MOUNT MODEL

Model	Weight (lbs)	Rating @ 20°C ΔT (BTU/hr)	Amps Current Draw at 115 volts AC	Fan size	Dimensions-Inches (HxWxD)
CC600F	14 lbs	3,300	0.6	2x6"	30 x 8.75 x 4

Efficiency: 49.4 Watts / °C ΔT based on average internal cabinet temperature

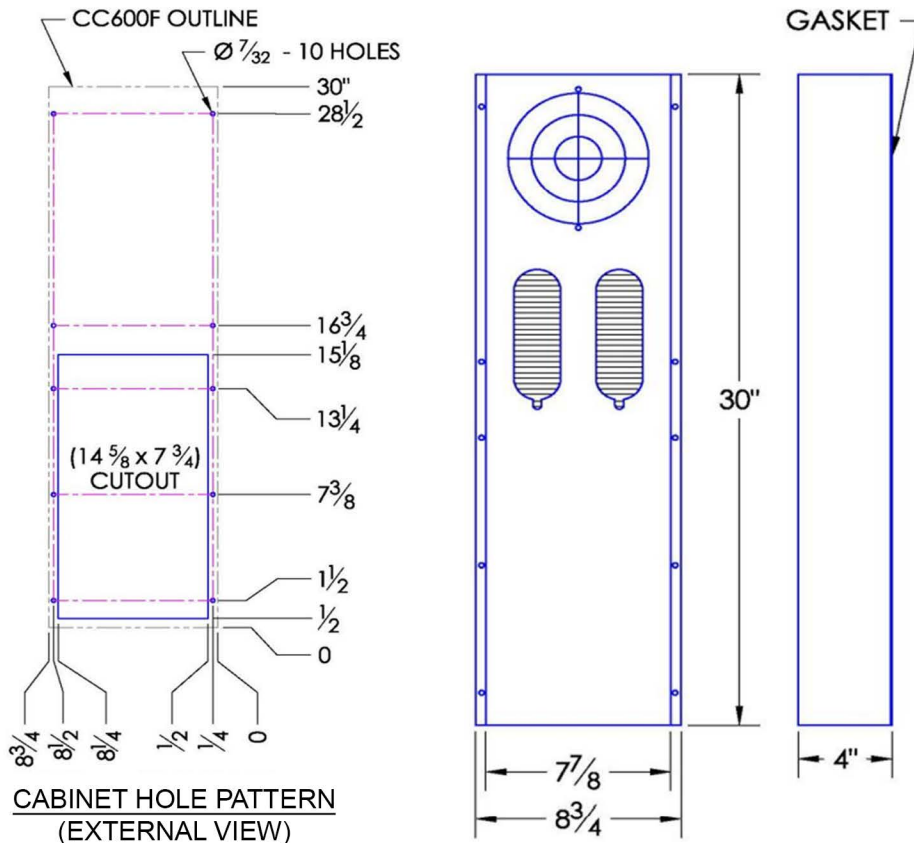

PRODUCT SPECIFICATIONS

1. UL Listed for TYPE 12 environments
2. CC600F Rated cooling: 988 Watts at 20°C ΔT (49.4 W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
3. Designed for surface mounting on outside of cabinet
4. Housing is aluminum (Standard color). Stainless Steel is available
5. Equipped with mounting gasket to maintain airtight seal
6. Available with VAC (115 & 230) and VDC (12, 24, & 48) fans. DC version includes junction box, consult website
7. Vertical and horizontal mounting
8. Optional: Inlet air-filter kit available upon request
9. For design, quote, and sizing assistance: call (512) 595-5700

*Subject to change without notice



CC600F Type 12
Air to Air Flush Mount Model

205 s. Edmond Street
Taylor, TX 76574
(512) 595-5700
www.norenthermal.com

CC600F TYPE 12

CCS-PBD-7.2.2-883349-C